


# MCT Brattberg DS-150 TF - Data Sheet

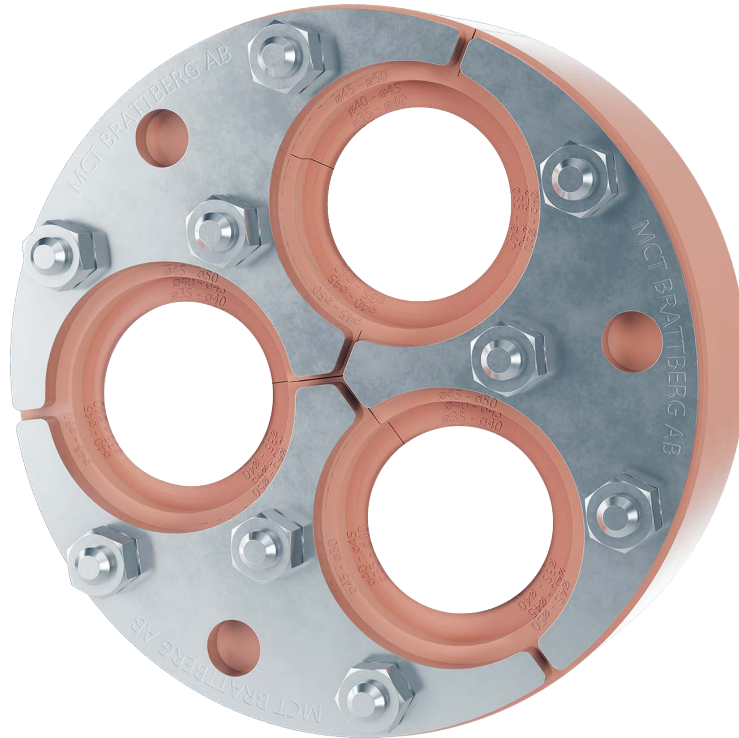

**Duct Seal Trefoil DS-150 TF** is intended to be used underground & in ducts to seal services between Ø35 – Ø55 mm.

- Manufactured sustainable in Sweden.
- Fully 100% recyclable materials.
- To seal holes with aperture dimension Ø150-153 mm.

| Performance.                            | Type.    | Standard.                                                |
|-----------------------------------------|----------|----------------------------------------------------------|
| IP Rating:                              | IP68.    | IEC 60529.                                               |
| In-service Constant water pressure:     | 0,3 Bar. | IEC 60529.                                               |
| In-service Catastrophic water pressure: | 1,5 Bar. | Third party witness hydrostatic type testing.<br>CP-0165 |

| Data.                  |                          |  |
|------------------------|--------------------------|--|
| Trade name:            | MCT Brattberg DS-150 TF. |  |
| Working temperature:   | -40 to +70 degrees C.    |  |
| Hardness:              | 60-80 IRHD.              |  |
| Shelf life:            | ≥ 10 years.              |  |
| Service life:          | ≥ 40 years.              |  |
| Hardware:              | Stainless steel 316.     |  |
| Sealing Material:      | TPE                      |  |
| DS150 is V0 Classified |                          |  |

